



VEILUX®

DUAL POWER TRUE DAY & NIGHT DNR COLOR CAMERA

SVS-56CDNRD




SPECIFICATIONS

ITEM	SVS-56CDNRD	
TV System	NTSC	PAL
Image Sensor	SONY 1/3" SuperHAD CCD	
Effective Pixel	768(H) x 494(V)	752(H) x 582(V)
Horizontal Resolution	Color: 560TV Lines, B/W: 700TV Lines	
Scanning System	2 : 1 Interlace	
Sync. System	Internal	
Frequency	(H)15.734 KHz (V)59.94 Hz	(H)15.625 KHz (V) 50.00 Hz
Video Output	1.0Vp-p / 75ohm Video 0.714Vp-p Sync 0.286Vp-p	
Burst Level	0.286Vp-p	
S/N Ratio	More than 50dB (V, Aperture, AGC off)	
Min. illumination	0.1Lux (Color), 0.001Lux (B/W f1.2 20IRE) 0.001Lux (Color Sens-Up), 0.00001Lux (B/W f1.2 20IRE, Sens-Up X32)	
Sense Up	Max 32 Times, 0.00001Lux	
Y Correction	0.45	
AGC	+ 18dB Max	
IRIS Control	Electrical IRIS / Lens IRIS (DC Lens)	
Electrical Shutter	1/60 (1/50)~1/120,000	
O.S.D	Built-In Lens, Brightness, Back Light, Shutter, AGC, Sense Up, White Balance, Day / Night, Motion, Privacy, Title, NEGA / POSI, Sharpness, Mirror, Zoom, Pan/Tilt	
Lens	C/GS Mount	
Operation Temp'	-10°C~50°C	
Operational Hum'	30%~80%	
Storage Temp'	-20°C~60°C	
Storage Hum'	20%~90%	
Power	12VDC / 24VAC	
Dimension	61(V) x 55(H) x 106(L)mm	
Weight	About 400g	

FEATURES

- 1/3" SONY Super HAD CCD
- High Resolution of 560TV Lines
- True Day & Night (ICR Type-IR Cut Filter Removable)
- Privacy Function
- Electronic IRIS
- DNR (Digital Noise Reduction)
- DSS (Digital Slow Scan)
- Blemish Auto Compensation (Zero Blemish)
- Controlled by OSD Menu
- Additional Functions
- Automatic White Balance, Back Light Compensation
- Automatic Gain Control, Motion Detection
- Digital Pan / Tilt / Zoom, Mirror, NEGA/POSI and SYNC functions are also available
- 12VDC / 24VAC - Dual Power

DIMENSIONS

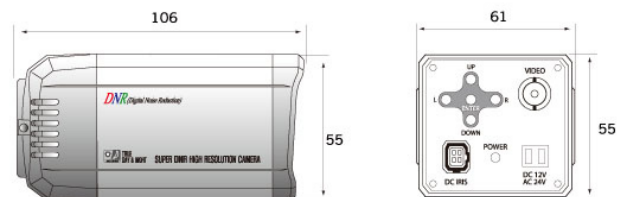

VEILUX®

The Art of Surveillance